

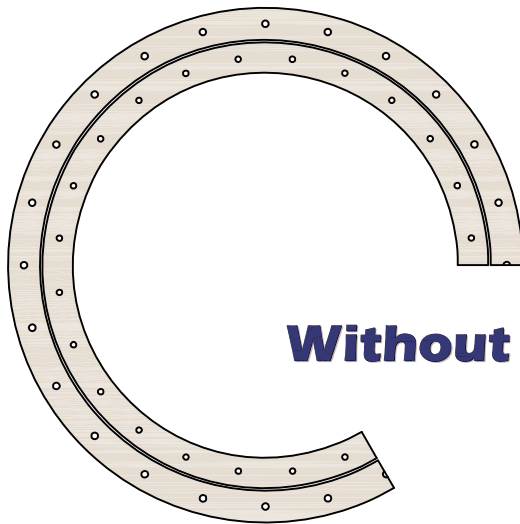


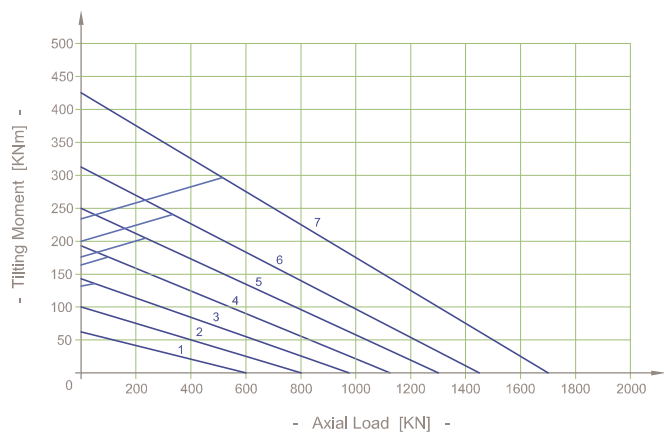

Without gear



SD.20.B

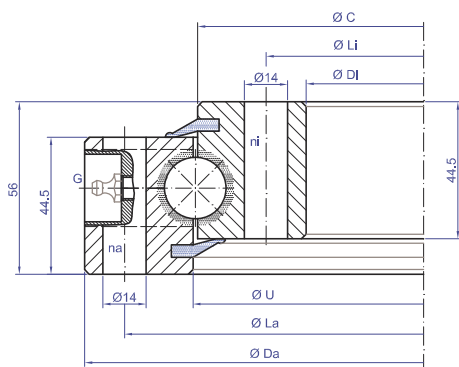

Bearing Type	Dimensions				Fixing holes				Mass
	Da mm	U mm	C mm	Di mm	La mm	na n°	Li mm	ni n°	Weight KG
1 SD.486.20.00.B	486	415,5	412,5	342	460	24	368	24	29
2 SD.616.20.00.B	616	545,5	542,5	472	590	32	498	32	37
3 SD.716.20.00.B	716	645,5	642,5	572	690	36	598	36	44
4 SD.816.20.00.B	816	745,5	742,5	672	790	40	698	40	52
5 SD.916.20.00.B	916	845,5	842,5	772	890	40	798	40	60
6 SD.1016.20.00.B	1016	945,5	942,5	872	990	44	898	44	67
7 SD.1166.20.00.B	1166	1096	1093	1022	1140	48	1048	48	77

G = N°4 x Greasennipples DIN 71412 AM 8x1 equally-spaced



SD.25.B

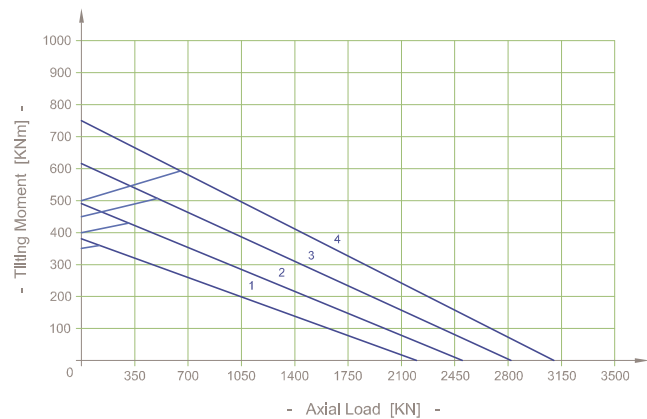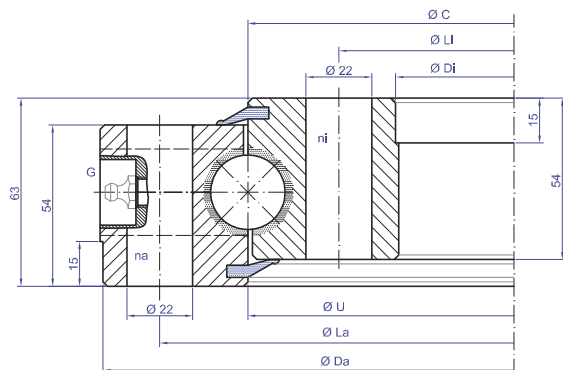

Bearing Type	Dimensions				Fixing holes				Mass
	Da mm	U mm	C mm	Di mm	La mm	na n°	Li mm	ni n°	Weight KG
1 SD.855.25.00.B	853	756	756	657	815	24	695	24	90
2 SD.955.25.00.B	953	856	856	757	915	28	795	28	101
3 SD.1055.25.00.B	1053	956	956	857	1015	30	895	30	115
4 SD.1155.25.00.B	1153	1056	1056	957	1115	30	995	30	128

G = N°4 x Greasennipples DIN 71412 AM 8x1 equally-spaced



SD.20.C

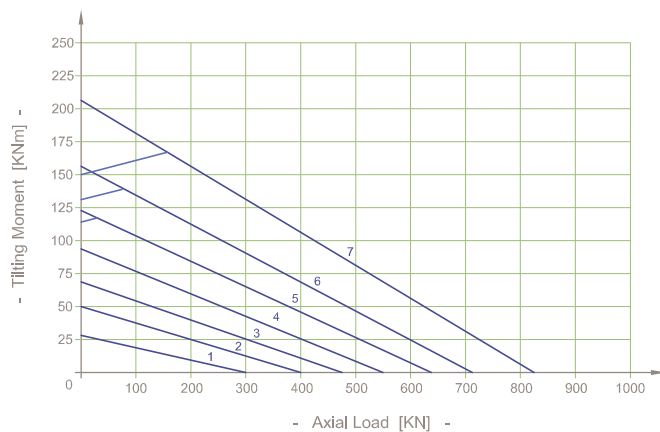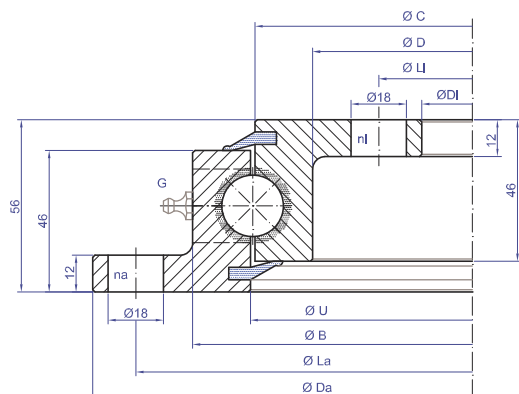

Bearing Type	Dimensions						Fixing holes				Mass
	Da mm	B mm	U mm	C mm	D mm	Di mm	La mm	na n°	Li mm	ni n°	Weight KG
1 SD.505.20.00.C	518	453	415,5	412,5	375	304	490	8	332	12	23,5
2 SD.650.20.00.C	648	583	545,5	542,5	505	434	620	10	462	14	31
3 SD.750.20.00.C	748	683	645,5	642,5	605	534	720	12	562	16	36,5
4 SD.850.20.00.C	848	783	745,5	742,5	705	634	820	12	662	16	43
5 SD.950.20.00.C	948	883	845,5	842,5	805	734	920	14	762	18	48
6 SD.1050.20.00.C	1048	983	945,5	942,5	905	834	1020	16	862	20	53
7 SD.1200.20.00.C	1198	1133	1096	1093	1055	984	1170	16	1012	20	62

G = N°4 x Greasennipples DIN 71412 AM 8x1 equally-spaced



SD.32.C

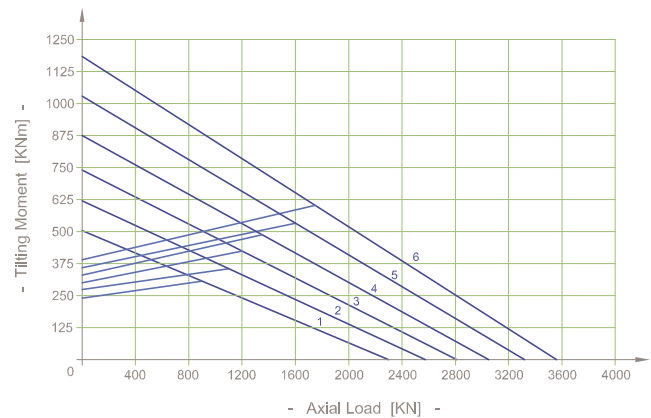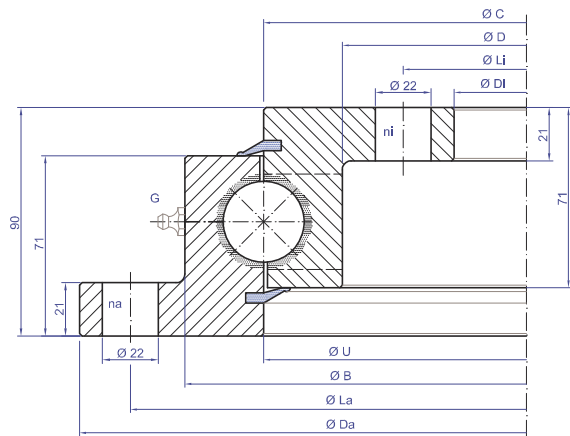

Bearing Type	Dimensions						Fixing holes				Mass
	Da mm	B mm	U mm	C mm	D mm	Di mm	La mm	na n°	Li mm	ni n°	Weight KG
1 SD.1100.32.00.C	1100	1017	955	955	893	805	1060	30	845	30	131
2 SD.1200.32.00.C	1200	1117	1055	1055	993	905	1160	30	945	30	145
3 SD.1300.32.00.C	1300	1217	1155	1155	1093	1005	1260	36	1045	36	159
4 SD.1400.32.00.C	1400	1317	1255	1255	1193	1105	1360	42	1145	42	172
5 SD.1500.32.00.C	1500	1417	1355	1355	1293	1205	1460	42	1245	42	186
6 SD.1600.32.00.C	1600	1517	1455	1455	1393	1305	1560	48	1345	48	200

G = N°4 x Greasennipples DIN 71412 AM 8x1 equally-spaced



SD.14-20-25.D

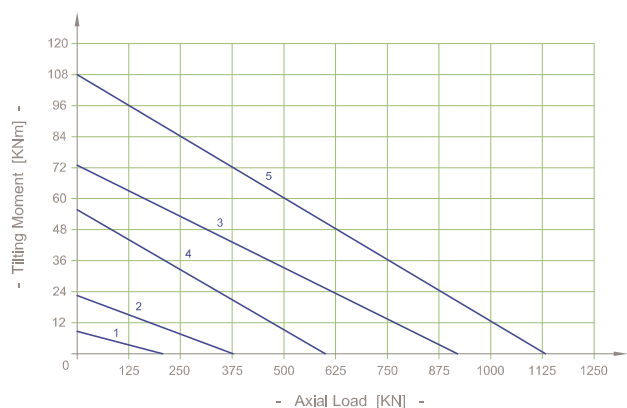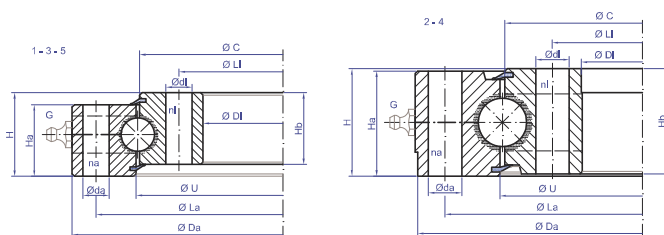

Bearing Type	Dimensions							Fixing holes						Mass
	Da mm	U mm	C mm	Di mm	Ha mm	Hb mm	H mm	La mm	na n°	da mm	Li mm	ni n°	di mm	Weight KG
1 SD.234.14.00.D.1	234	180,5	177,5	124,5	30	30	35	214	24	11	144,5	20	11	7
2 SD.329.20.00.D.1	328	262	258	192	45	45	45	305	16	14	215	16	14	18
3 SD.430.25.15.D.1	430	348	342	260	53	53	65	400	24	14	290	20	16	32
4 SD.475.20.00.D.1	474	407	403	336	45	45	45	450	24	14	360	24	14	30
5 SD.505.25.15.D.6	505	417,5	412,5	325	64,5	60	66	475	24	17	355	24	17	48

G = For the number and the position of the greasennipples, please ask for a detailed drawing of the bearing



SD.18.D-R

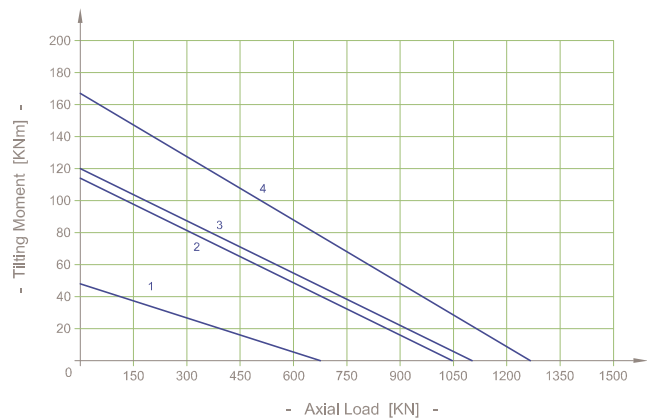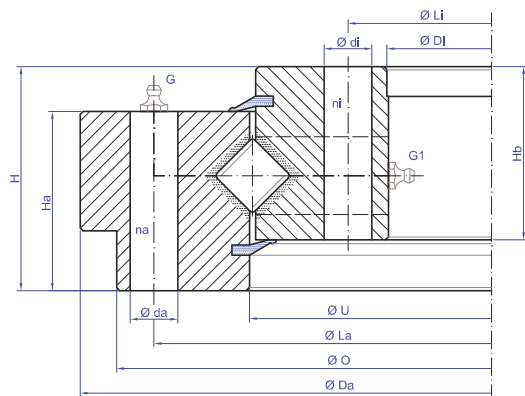

Bearing Type	Dimensions							Fixing holes					Mass	
	Da mm	U mm	C mm	Di mm	Ha mm	Hb mm	H mm	La mm	na n°	da mm	Li mm	ni n°	di mm	Weight KG
1 SD.403.18.15.D.1-R	403,5	379	312	235	43	45	55	358	24	13	259	28-1	13	24
2 SD.562.18.15.D.1-R	562	560	490	418	50	50	60	538	30	14	440	30	14	44
3 SD.589.18.15.D.1-R	589,5	565	476	384	60	58	75	540	36	16	410	36-1	16	58
4 SD.695.18.15.D.1-R	695	670	577	480	64	57	77	640	36	18	508	36-1	18	75

G = For the number and the position of the greasennipples, please ask for a detailed drawing of the bearing

SD.25-30.D-R

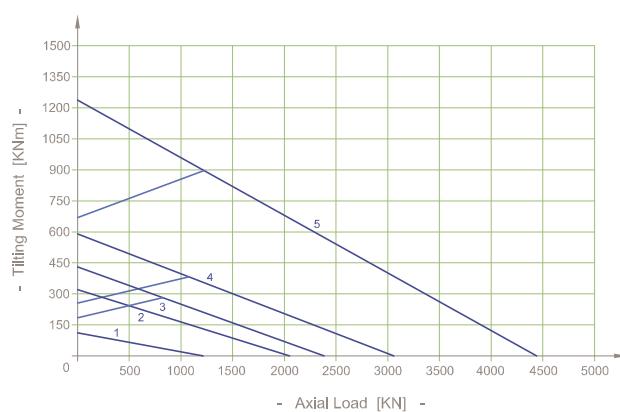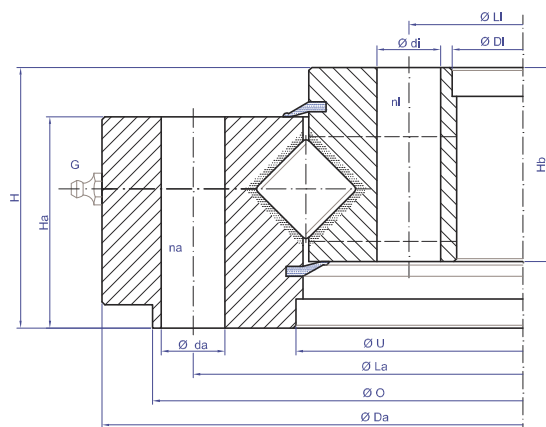

Bearing Type	Dimensions							Fixing holes					Mass	
	Da mm	U mm	C mm	Di mm	Ha mm	Hb mm	H mm	La mm	na n°	da mm	Li mm	ni n°	di mm	Weight KG
1 SD.500.25.15.D.1-R	500	495	403	306	63	63	75	466	30	18	336	30-1	18	52
2 SD.816.25.15.D.1-R	816	781	682	574	73	67	90	753	18	22	604	18	22	120
3 SD.864.25.15.D.3-R	864	833	768	678	73	68	82	800	24	M16	706	24	18	109
4 SD.979.30.15.D.2-R	979	932	845	718	79	82	100	893	18	M20	753	18	22	180
5 SD.1345.30.15.D.1-R	1345	-	1223	1115	85	85	108	1290	36	22	1150	42	22	311

G = For the number and the position of the greasennipples, please ask for a detailed drawing of the bearing